



GB

INSTALLATION INSTRUCTION

JEEP TIRE COVER

E

INSTRUCCIONES DE MONTAJE

CUBIERTA DE NEUMÁTICO PARA EL JEEP

F

NOTICE DE MONTAGE

PROTEGE ROUE DE SECOURS JEEP

Subject to alteration without notice
Sujeto a cambios sin aviso
Sous réserve de modifications techniques

K6858690

DAIMLERCHRYSLER

GB

- If spare tire is not already mounted on vehicle, install the tire and wheel and tighten all the lug nuts.
- To protect tire and cover, it is recommended that the spare tire be clean and dry before installing cover.
- See note below.

E


- Si el neumático de repuesta no esta montada en el vehiculo, instala el neumático y la rueda.
- Para proteger el neumático y la cubiera, se recomienda que el neumático de repuesta este limpio y seco antes de instalar la cubierta.
- Vea la nota abajo.

F

- Si la roue de secours n'est pas déjà installée sur le vehicule, installez le pneu et la roue et bien serrer tous les écrous.
- Pour préserver le pneu et son protège, il est recommandé que la roue de secours soit propre et sèche avant d'installer le protège.
- Voir la note ci-dessous.



A

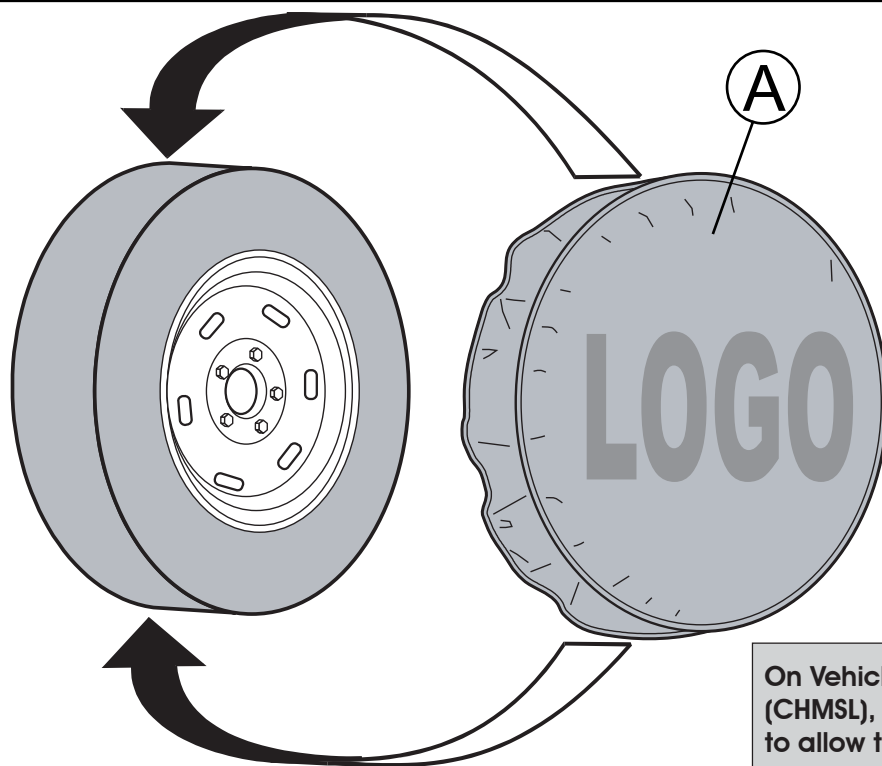

NOTE:

On Vehicles with Center Mount Stop Lamp (CHMSL), the lug nuts may need to be loosened to allow the Tire Cover to be Installed Properly at the Top/Backside of the Tire - Then Re-Tighten the Lug Nuts per Procedure in Owner's Manual - Refer to Instructions in the Kit for Obtaining the Best Fit/Appearance of the Tire Cover.

1